Cellular SMA Antenna




Specifications

Frequency range	700–2700 MHz
Polarization	Linear (vertical)
Gain	2.0 dBi
VSWR	≤1.3
Impedance	50 Ω
Connector type	SMA male (straight)
Operating temperature	−40 °C to +85 °C
IP rating	IP33
RoHS compliant	Yes

Copyright © Wavetel Technology Limited. All Rights Reserved.

Dimensions

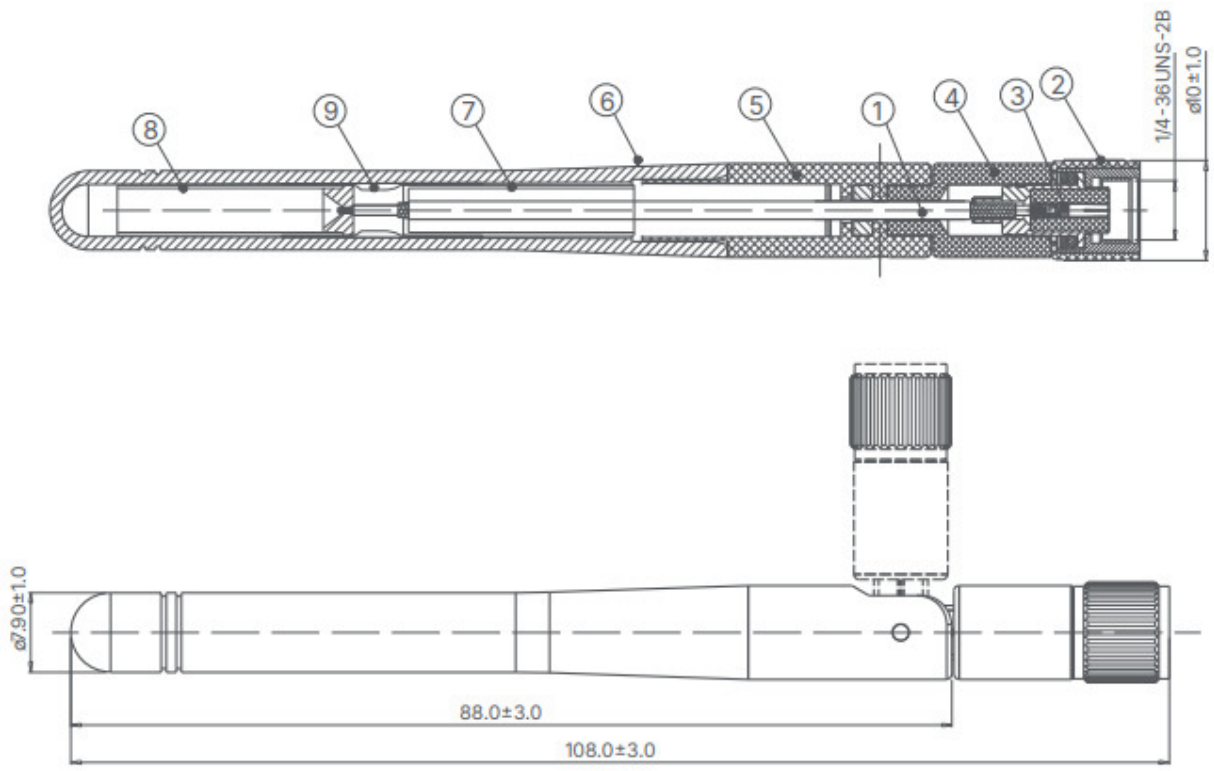

(mm)

Explore this accessory online

Scan for product information and documentation.
waveteliot.com

Copyright © Wavetel Technology Limited. All Rights Reserved.