4G Puck Antenna

WA-A-MGT11



Specifications

Frequency range	600-960 MHz; 1700-2700 MHz
Polarisation	Linear
Gain	Max 3.9 dBi
Radiation pattern	Omni-directional
VSWR	<5
Impedance	50 Ω
Connector	SMA Male
Cable type	RG174
Mounting	Screw + adhesive
Enclosure material	ABS
Cable length	2 m
Dimensions	Ø81 × 15 mm
Weight	Not specified
Ingress protection	Not specified
Operating temperature	-40 °C to +85 °C
RoHS compliant	Yes

Copyright © Wavetel Technology Limited. All Rights Reserved.

Dimensions

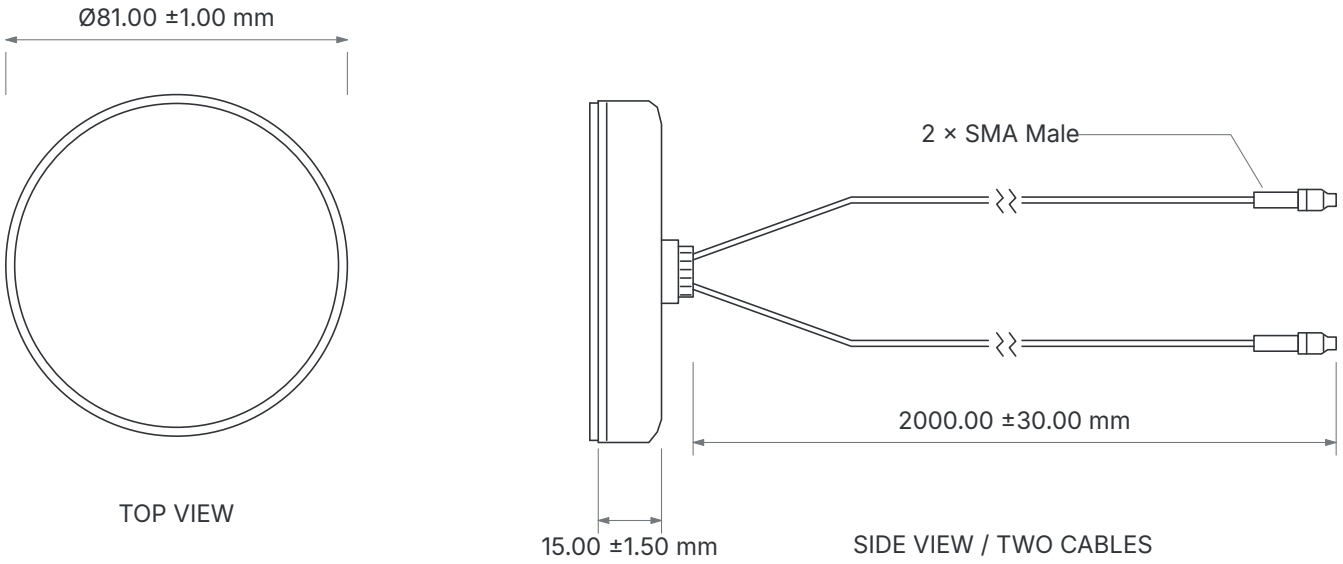

(mm)

Related products

WR143, WR153, WR245, WR244, WR565, WR564, WR677-M, WR647-D

Copyright © Wavetel Technology Limited. All Rights Reserved.

2D radiation patterns

4G1

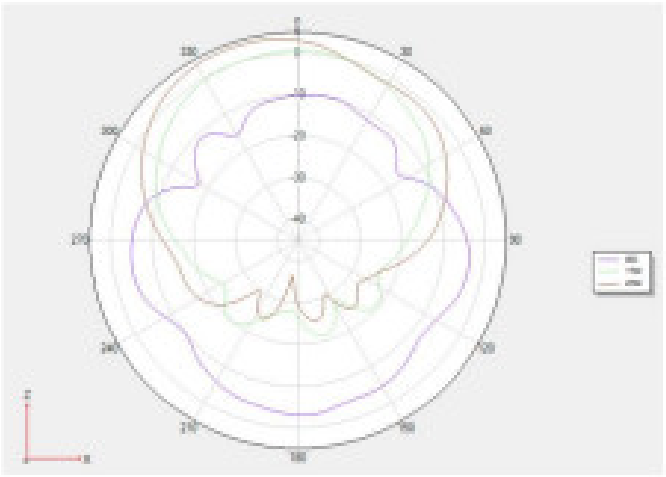

4G2

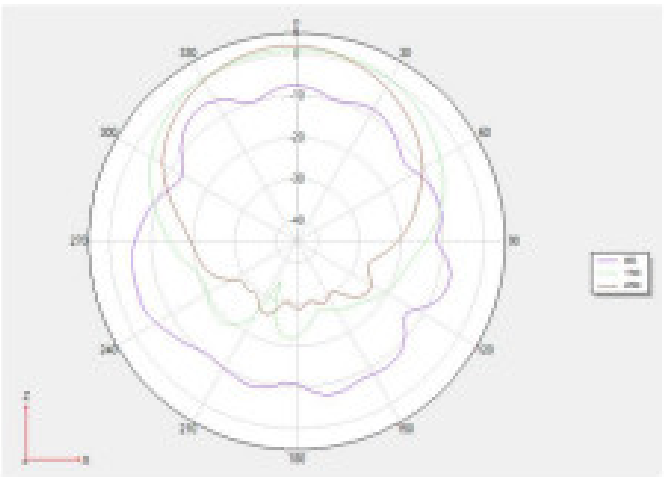

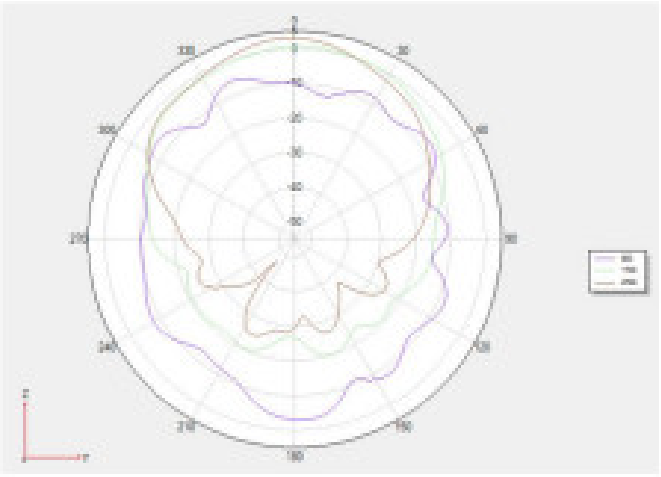

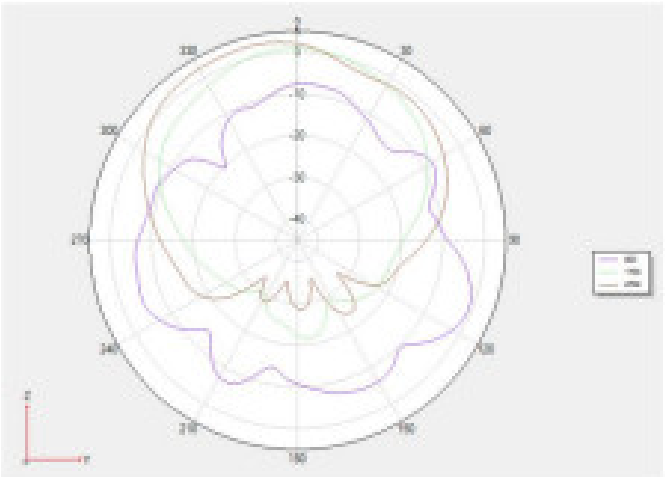

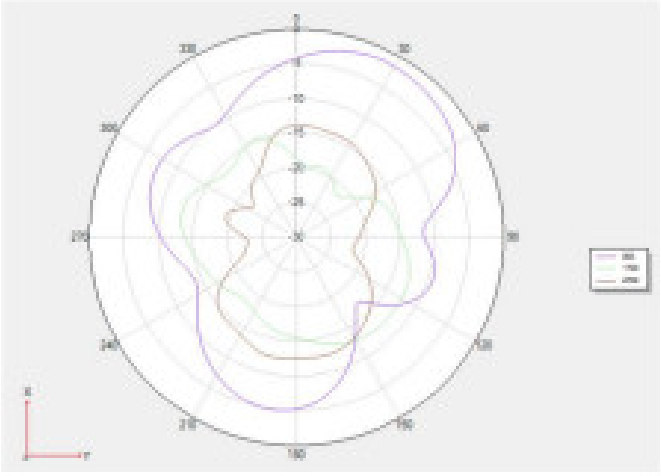

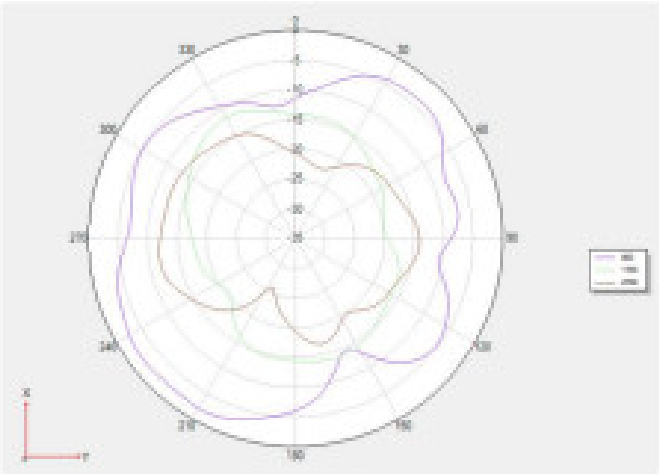

Copyright © Wavetel Technology Limited. All Rights Reserved.

3D radiation patterns

4G1

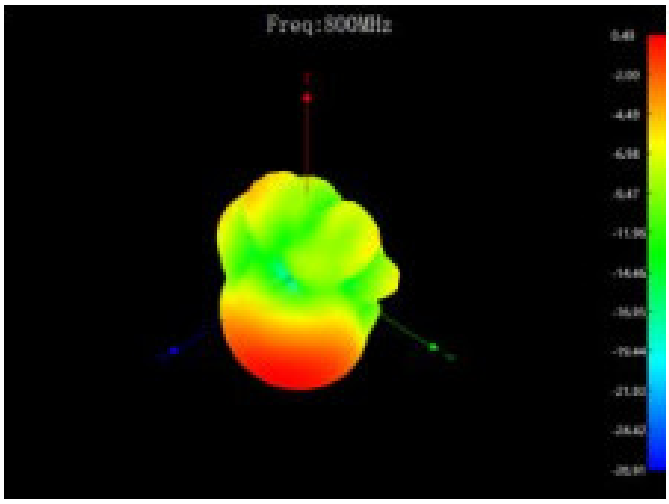

4G2

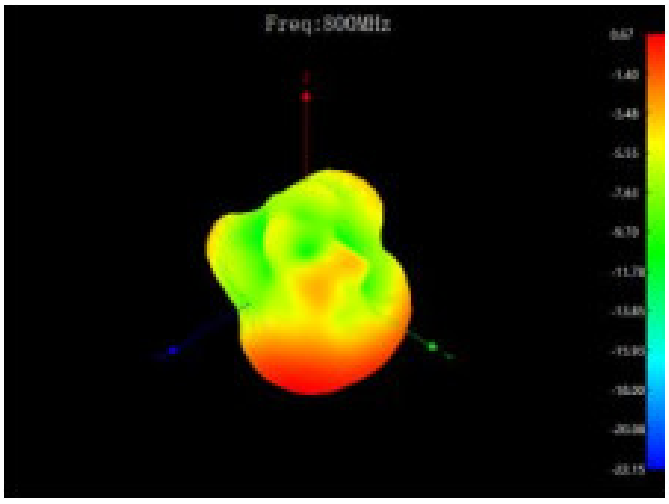

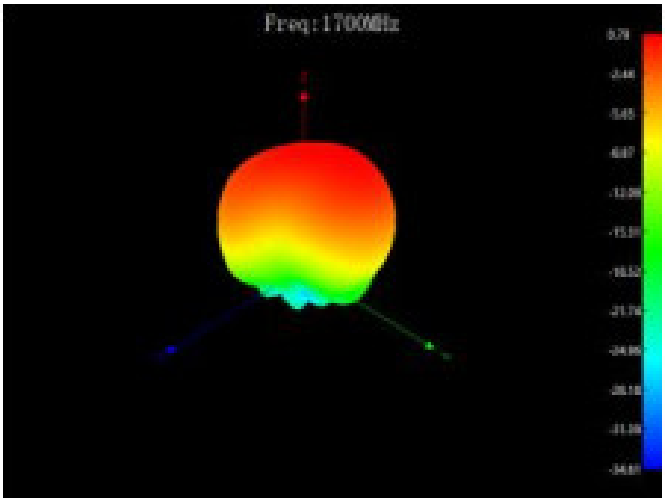

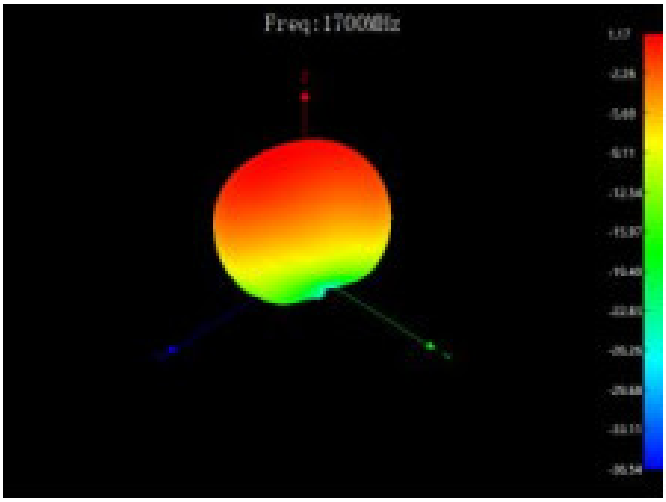

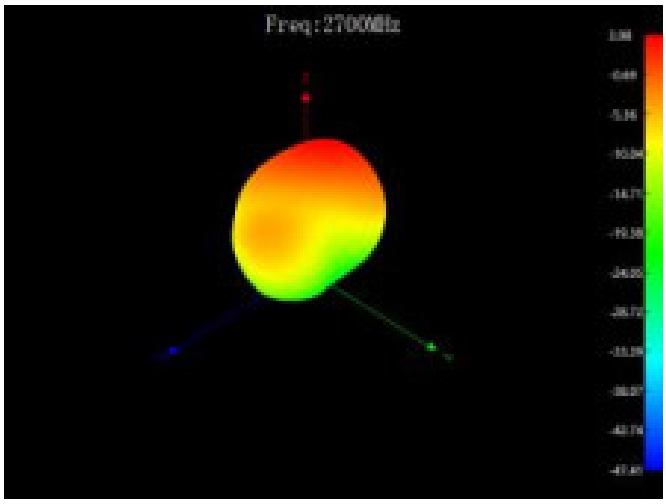

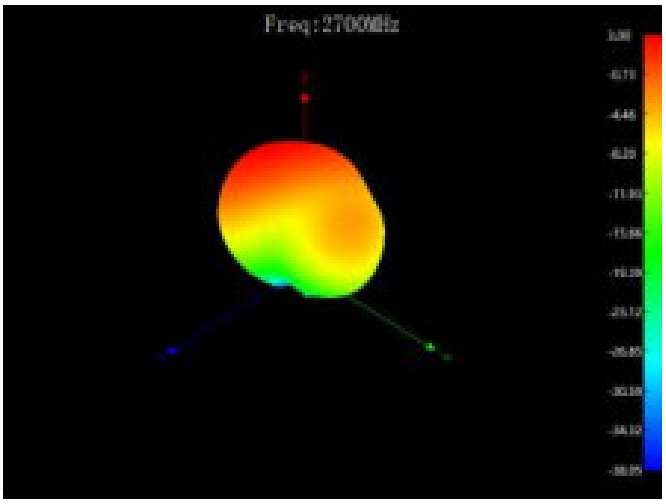

Copyright © Wavetel Technology Limited. All Rights Reserved.