
3.5mm 1×2 Terminal Block

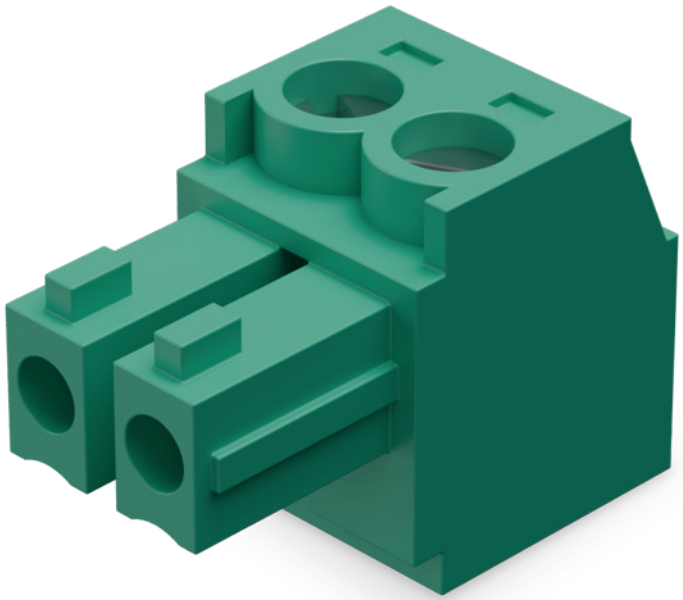


Specifications


Insulation material	PA66
Contact material	Copper alloy
Contact finishing	Tin-plated
Wire cross section	1.5mm²(16-28 AWG)
Pitch	3.5 mm, 2 positions
Operating temperature	-40°C~+105°C
Rated voltage	300V(UL)
Rated current	8A(UL)
Contact resistance	20mΩ
Dielectric voltage-withstand	2000V/1min
Strip Length	9-10 mm
Flammability rating	UL94V-0

Copyright © Wavetel Technology Limited. All Rights Reserved.


Dimensions



Front view

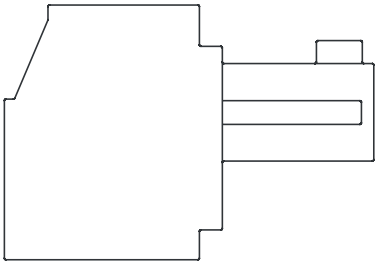

Side view

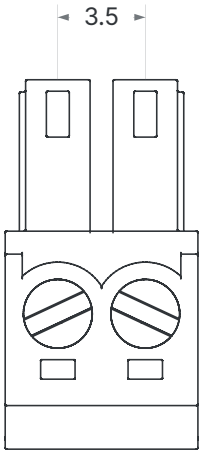

Top view

(mm)

Explore this accessory online

Scan for product information and documentation.
waveteliot.com

Copyright © Wavetel Technology Limited. All Rights Reserved.