Wi-Fi Fiberglass Antenna

WA-A-WFBLG01




Specifications

Frequency range	2.4-2.5 GHz; 5.15-5.85 GHz
Polarisation	Vertical
Gain	Max 5.17 dBi
Radiation pattern	Omni-directional
VSWR	<2
Impedance	50 Ω
Connector	N-Female
Maximum input power	10 W
Mounting	Screw Mounting
Enclosure material	Fiberglass Radome
Dimensions	Ø23.5 × 160 mm
Weight	90 g
Ingress protection	IP67
Operating temperature	-40 °C to +85 °C
RoHS compliant	Yes

Copyright © Wavetel Technology Limited. All Rights Reserved.

Dimensions

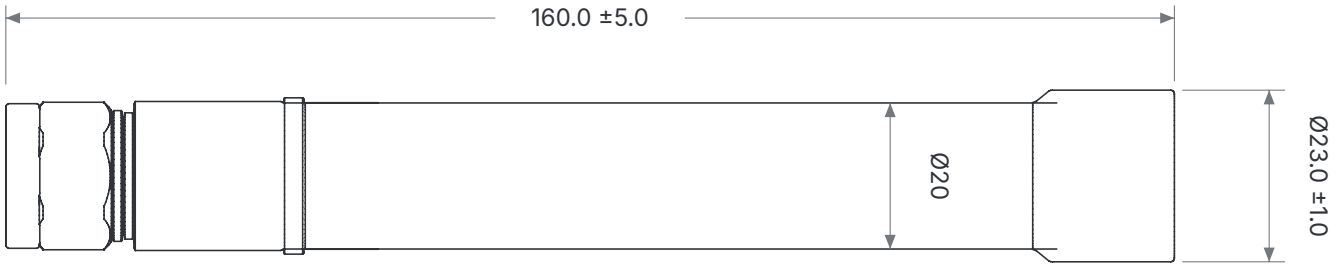


(mm)


Related products


WR143, WR153, WR245, WR244, WR575, WR574, WR565, WR564, WR578, WR677, W677-D, WR677-M, WR647-D

Copyright © Wavetel Technology Limited. All Rights Reserved.

2D radiation patterns

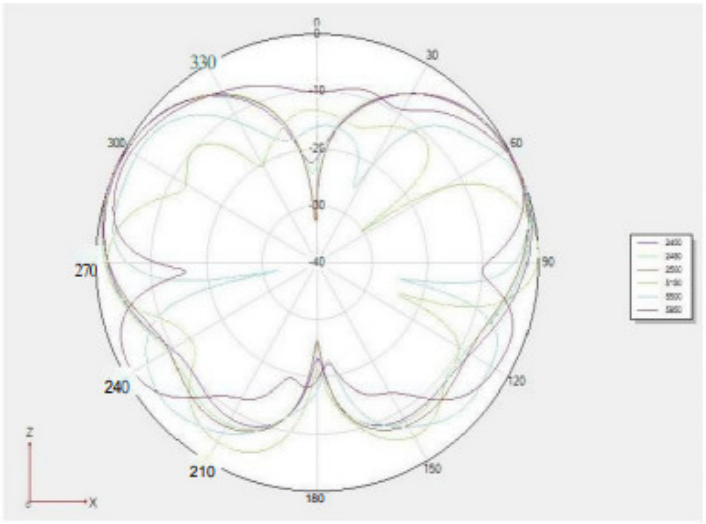


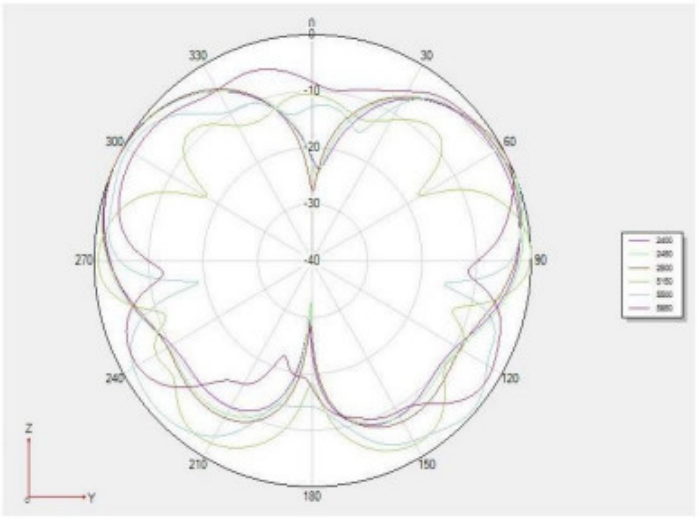

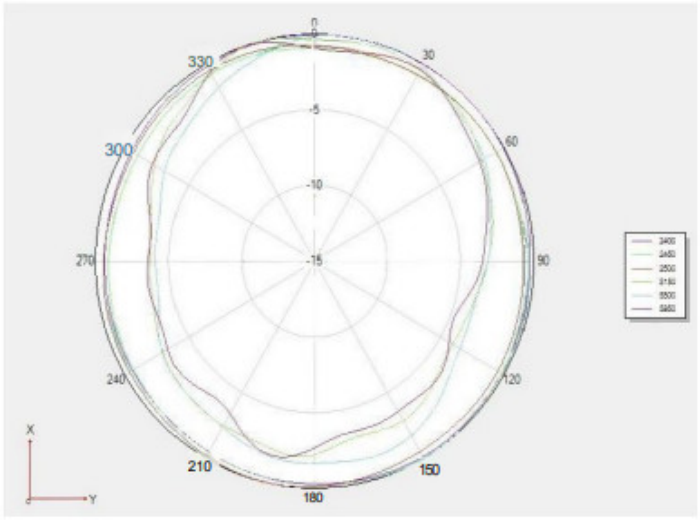

Copyright © Wavetel Technology Limited. All Rights Reserved.

3D radiation patterns

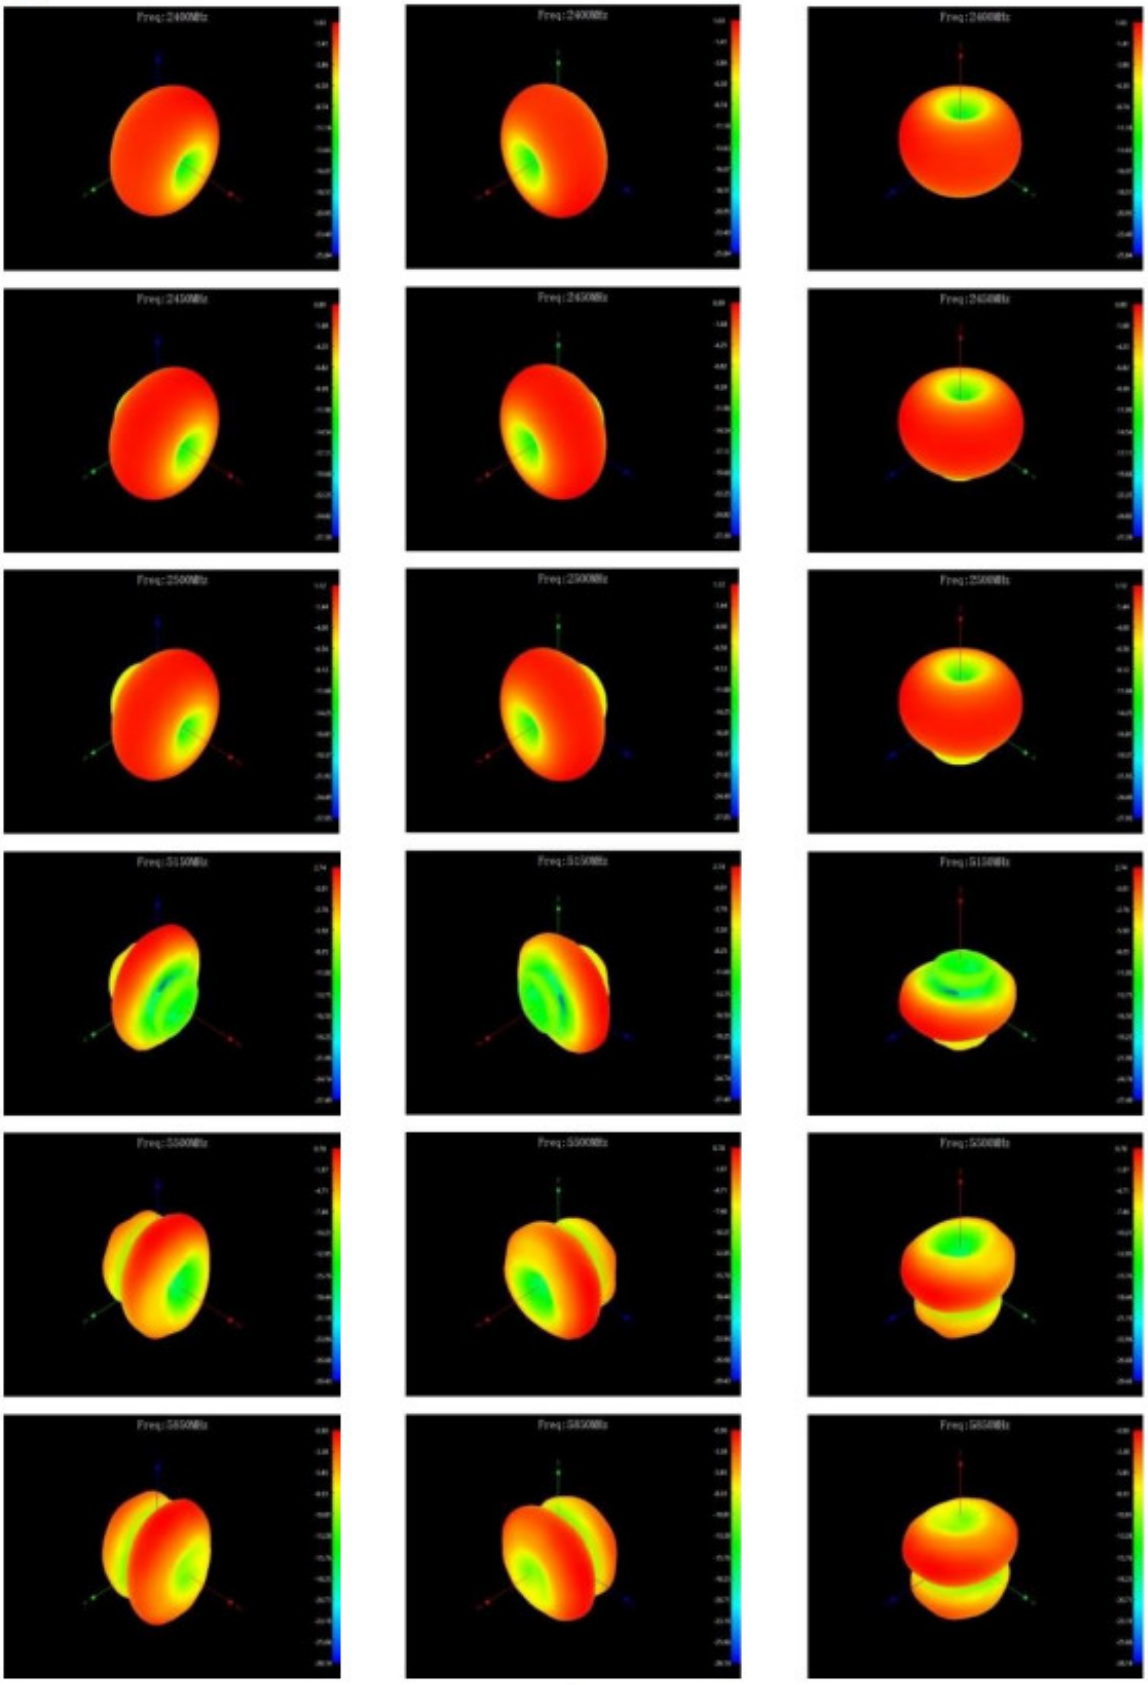

Copyright © Wavetel Technology Limited. All Rights Reserved.